


SP-SW31HDMI

3 x 1 HDMI Switcher

3-Input HDMI Switcher with IR Control

Typical Application

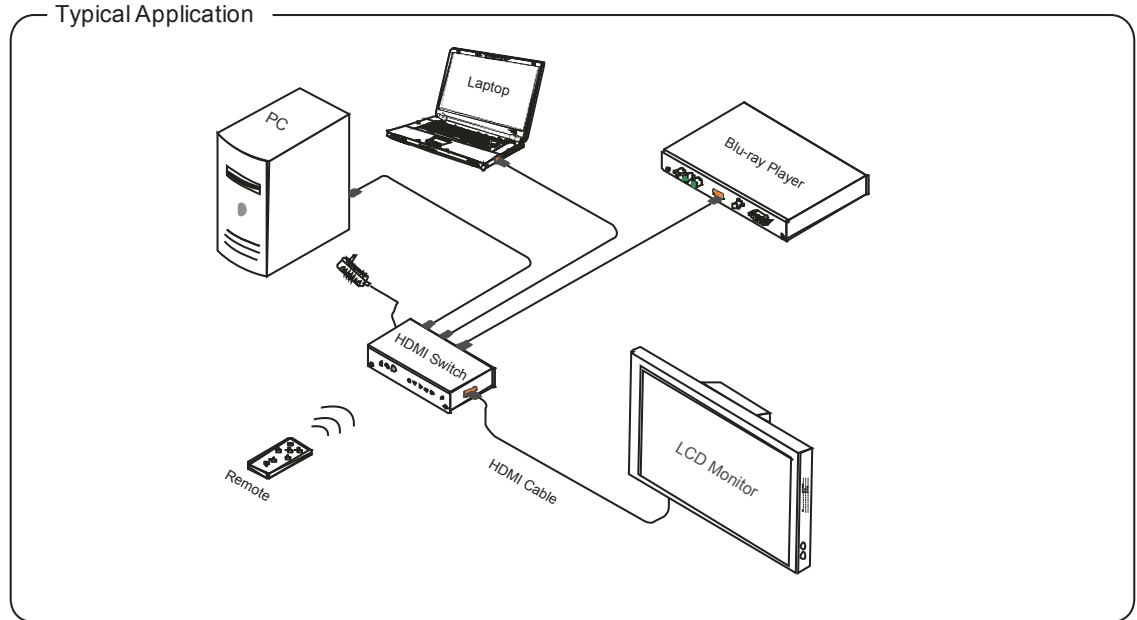

FEATURES & INSTALLATION

The SP-SW31HDMI is a 3x1 HDMI switcher. It is controllable via IR with our PixiePlus, PixiePro and Networked Room Controller (NRC) control products. The SP-SW31HDMI can also be used as a stand-alone switcher, and comes with a remote control.

Use the SP-SW31HDMI with HDMI cable lengths of up to 65 feet (20m) from the switcher to the source. Fully compatible with all current HDMI video and audio signals.

INSTALLATION:

- Turn off all input and output devices that you will be connecting to the SP-SW31HDMI

- Connect up to three input devices via HDMI cables (not included) to the three inputs on the switcher

- Connect your display/projection device to the switcher's output port via HDMI cable (not included)

- Power up all devices and switch between sources either by using the Source Selection button on the switcher, or with the included remote control

- Use the PixiePlus, PixiePro or NRC (optional) for IR control—visit www.spcontrols.com for more information



**Simple.
Intuitive.
Control.**

SP Controls, Inc.

930 Linden Avenue
South San Francisco
California 94080
phone: (877) 367-8444
fax: (650) 392-7881
email: help@spcontrols.com

TECHNICAL SPECIFICATIONS

HDMI Signal Input:	3 channels
HDMI Signal Output:	1 channel
Power Supply:	5VDC, 1000mA
Power Consumption:	<2W
HDMI Support Version:	HDMI 1.3
HDCP Support Version:	HDCP 1.2
HDMI Resolution:	1080p, 1080i, 720p, 720i, 576p, 576i, 480p, 480i
Color Video Format:	24bit, 30 bit deep color, 36bit deep color
Audio Format:	DTS/HD/Dolby-TrueHD/LPCM7.1/DTS/Dolby-AC3/DSD
Input/Output TMDS:	0.5-1.5p-p (TMDS)
Input/Output DDC:	5Vp-p (TTL)
Dimensions:	4.5"W x 2.375"D x 1"H
Net Weight:	.412 lb
Outer Shell:	Iron metal
Color:	Black