


SP2-SMCHAS

SmartPanel Mini System Controller

A powerful yet simple projector control system, featuring a low profile and designer finishes.

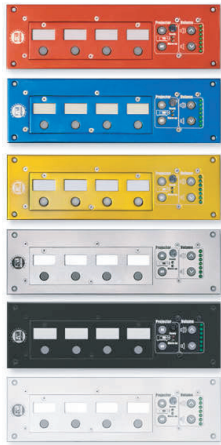


The Mini-System controller now available in six designer finishes


Anodized Red	SP2-SMCHAS-AR
Anodized Blue	SP2-SMCHAS-AB
Anodized Gold	SP2-SMCHAS-AG
Textured Gray	SP2-SMCHAS-GR
Black	SP2-SMCHAS
Textured White	SP2-SMCHAS-WH



Optional SmartDrawer panel to be conveniently installed beneath the tabletop



Optional Audio Follow Video Pre-amplifier provides 5 x 1 stereo audio switching, 4 x 1 component video switching, or 2 x 1 S-video switching

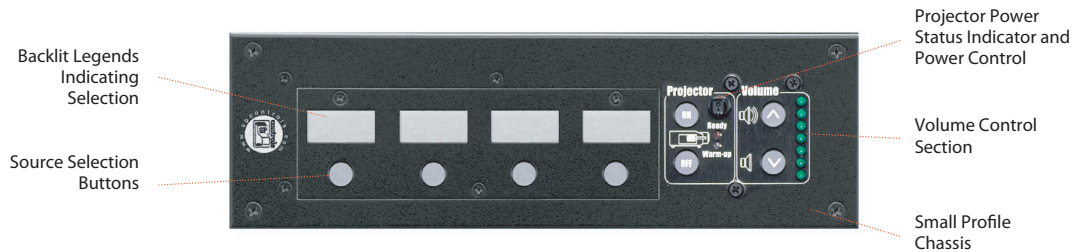

(Small chassis model SP2-SMCHAS shown)

FEATURES

The SmartPanel makes the latest projector technology easy to use. No more wandering remotes, dead batteries or fragile touch screens. A SmartPanel compatible projector is required. Please visit our website for a list of supported projectors.

THE PANEL'S USER-FRIENDLY INTERFACE is clearly labeled, featuring prominent source selection buttons and backlit indicators. It's obvious how and where to connect your sources. No more Plug and Pray!

The SP2-SMCHAS model is suitable for controlling permanently installed devices where no external patch point is needed.

The SP2-SMCHAS comes in six different colors for installations where aesthetics are a top priority. Available in Anodized Deep Red, Anodized Deep Gold, Anodized Deep Blue, Black, Gray, and Powder-Coated White.

Small profile (10.25" x 3.125") allows a great range of ease and flexibility in placement of

the control system. The panel can fit in podiums, desktops, and in specially designed retractable shelves.

NO PROGRAMMING IS NECESSARY. The SmartPanel is configured in a few minutes with our free configuration utility. (Windows 95/98/00/XP/NT/Vista required)

CONFIGURABLE SHUTDOWN TIMER shuts off projector power after a period of inactivity.

Configurable relays provide contact closure control for powered screens, lifts, and/or switches.

Optional Audio Follow Video Pre-amplifier (AFVP) provides 5 x 1 audio and 4 x 1 video switching. The AFVP unit is required when sending audio to an external sound system. Not required when only built-in projector speakers are used. Equalization and gain are independently configurable per channel. Sold Separately.



**Simple
and
Intuitive**

SP Controls, Inc.
930 Linden Avenue
South San Francisco
California 94080
phone: (877) 367-8444
fax: (650) 392-7881
email: help@spcontrols.com

TECHNICAL SPECIFICATIONS

Projector Control Ports:	1 RS-232, 1200 bps to 38,400 bps 1 infrared emitter (incl.) or wired remote
Configurable Control Relays:	4-switched when input source changes 3-switched when projector power changes
Relay Specifications:	500mA, 50V (max.)
Configuration Port:	Port Type: RS-232 (DB-9 male to female straight thru cable not incl.) Software: Free Configuration Utility and Projector drivers available online (Windows 95/98/00/XP/NT/Vista only)
Large Chassis Model Dimensions:	8.25" (h) x 10.25" (w) x 1.0" (d)
Small Chassis Model Dimensions:	3.125" (h) x 10.25" (w) x .75" (d)
Finish:	Finely brushed anodized aluminum available in Deep Red, Deep Blue, Deep Gold, and Black
Power Supply:	600mA, 12V DC regulated, CSA and UL approved